


Mandrin automatique à pinces vulcanisées

**Mandrin en position ouvert =
Cylindre tout à l'avant,
positionné à droite.**

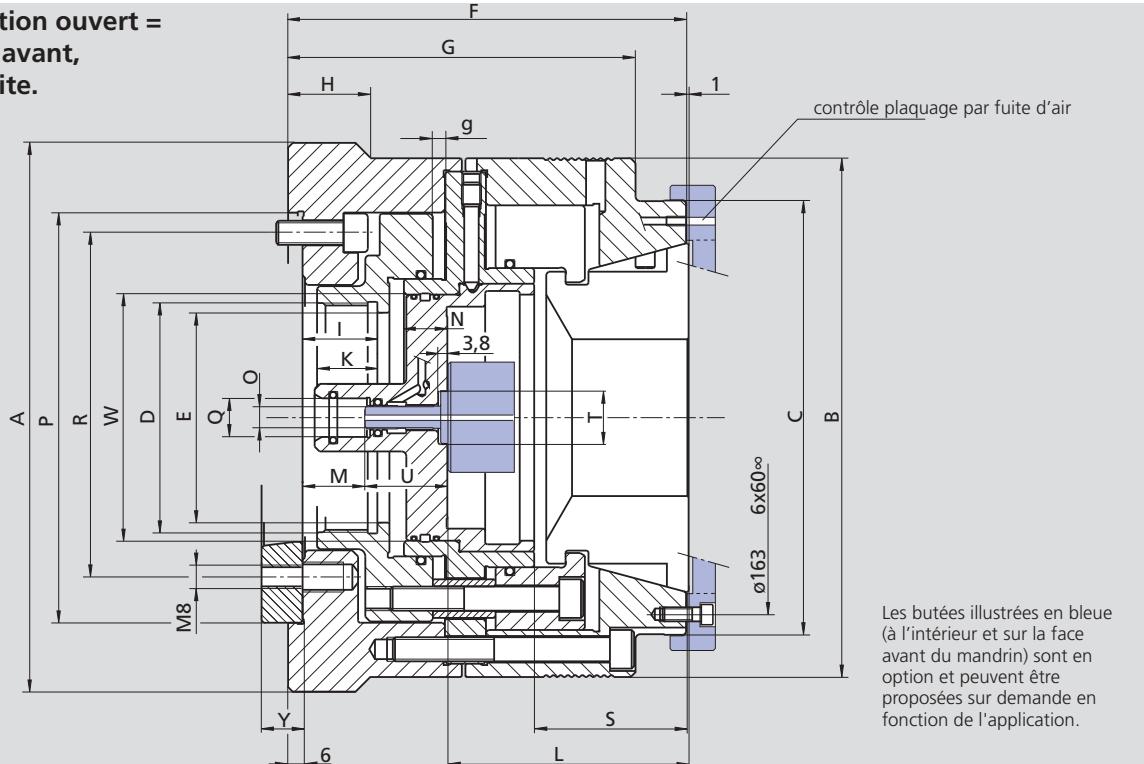

Sujet à changements techniques

Pour plus d'informations détaillées, merci de demander le plan technique.

SMW-AUTOBLOK Type		KSZ-AZL 100							
Fixation		Z170		Z220		A6		A8	
Id. No.		194741		195244		194783		195245	
A	215		230		215		230		
B	-		215		-		215		
C	180		180		180		180		
D	M95 x 2		M115 x 2		M95 x 2		M115 x 2		
E	87		107		87		107		
F	165		165		176		178		
G	144		144		155		157		
H	-		37		-		37		
I	36		36		36		36		
K	25		25		25		25		
L	99		99		99		99		
M	25		25		25		25		
N	17		17		17		17		
O	M12		M12		M12		M12		
P H6	170		220						
Q	16		16		16		16		
R	133.4	6 x 60°	M12	171.4	6 x 60°	M16	133.4	6 x 60°	M12
S	63		63		63		63		
T	22		22		22		22		
U	34.3		34.3		34.3		34.3		
V	M12		M12		M12		M12		
W	102		102		102		102		
X	111		111		111		111		
Y	-		-		17		19		
Course	g	9		9		9		9	
Vitesse maximale	tr/min.	5000		5000		5000		5000	
Force de traction max.	daN	6500		6500		6500		6500	
Force de serrage max.	daN	8500		8500		8500		8500	
Masse sans pinces	kg	33		35		34		36	
Cylindres recommandés	Type	VNK 200-86		VNK 225-95 / VNK 250-110		VNK 200-86		VNK 225-95 / VNK 250-110	
Vitesse maxi cylindre	tr/min.	4500		4000 / 3600		4500		4000 / 3600	

Référence de commande

Dotation: Mandrin + vis de fixation


Fixation broche	Taille	KSZ-AZL 100
Z 170		194741
A 06		194783
Z 220		195244
A 08		195245

Extracteur pinces



Accessoires	Taille	KSZ-AZL 100
pneumatique		194744

Pinces à segments vulcanisées pour KSZ-AZL

Pinces de serrage vulcanisées en acier quadrillées ébauche

ROND*

Ø	42	43	44	45	46	47	48	49	50	51	52	53	54
Id. No.	195081	195082	195083	195084	195085	195086	195087	195088	195089	195090	195091	195092	195093
Ø	55	56	57	58	59	60	61	62	63	64	65	66	67
Id. No.	195094	195095	195096	195097	195098	195099	195100	195101	195102	195103	195104	195105	195106
Ø	68	69	70	71	72	73	74	75	76	77	78	79	80
Id. No.	195107	195108	195109	195110	195111	195112	195113	195114	195115	195116	195117	195118	195119
Ø	81	82	83	84	85	86	87	88	89	90	91	92	93
Id. No.	195120	195121	195122	195123	195124	195125	195126	195127	195128	195129	195130	195131	195132
Ø	94	95	96	97	98	99	100						
Id. No.	195133	195134	195135	195136	195137	195138	194742						

Pinces de serrage vulcanisées en acier lisses rectifiées

ROND*

Ø	42	43	44	45	46	47	48	49	50	51	52	53	54
Id. No.	195141	195142	195143	195144	195145	195146	195147	195148	195149	195150	195151	195152	195153
Ø	55	56	57	58	59	60	61	62	63	64	65	66	67
Id. No.	195154	195155	195156	195157	195158	195159	195160	195161	195162	195163	195164	195165	195166
Ø	68	69	70	71	72	73	74	75	76	77	78	79	80
Id. No.	195167	195168	195169	195170	195171	195172	195173	195174	195175	195176	195177	195178	195179
Ø	81	82	83	84	85	86	87	88	89	90	91	92	93
Id. No.	195180	195181	195182	195183	195184	195185	195186	195187	195188	194743	195189	195190	195191
Ø	94	95	96	97	98	99	100						
Id. No.	195192	195193	195194	195195	195196	195197	195198						

* Concentricité identique DIN 6343

